


FRV 130 Variable Flow Pump

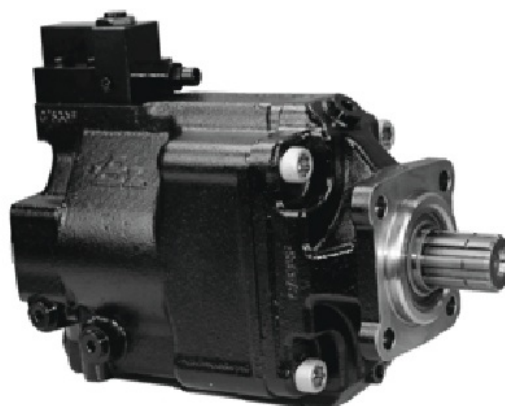

Variable displacement pump with pressure and flow adjustment (Load Sensing) with three different displacement options (95, 110, or 130 cc/rev) and selectable rotation. Compact design for direct mounting with PTOs in agricultural, forestry, load handling, snow and ice and waste collection applications.

Specifications

Rotation	Selectable	CW, CCW
Displacement (cm ³ /rev)		130 / 110 /95 *
Max. pressure (psi)	Continuous Intermittent	5220 6090
Max. speed (rpm)	Continuous Stand By	1800 3000
Max. working temperature		176°F
Viscosity	Recommended Allowed	20 ÷ 30mm ² /s (cSt) 15 ÷ 400 mm ² /s (cSt)
Weight (lbs)		59

Features

- External selectable rotation
- Light weight and compact design
- Different suction fitting alternatives (optional)
- Flow adjustable from 95cc-130cc

Uses


- Crane applications
- Fire trucks and tankers
- Snow and ice removal



+420 720 209 103 +420 792 335 980 +420 777 647 096

HYDRAULICKÉ KOMPONENTY
SERVIS, TECHNICKÁ PODPORA
NÁHRADNÍ DÍLY A PŘÍSLUŠENSTVÍ

FRV 130 Variable Flow Pump

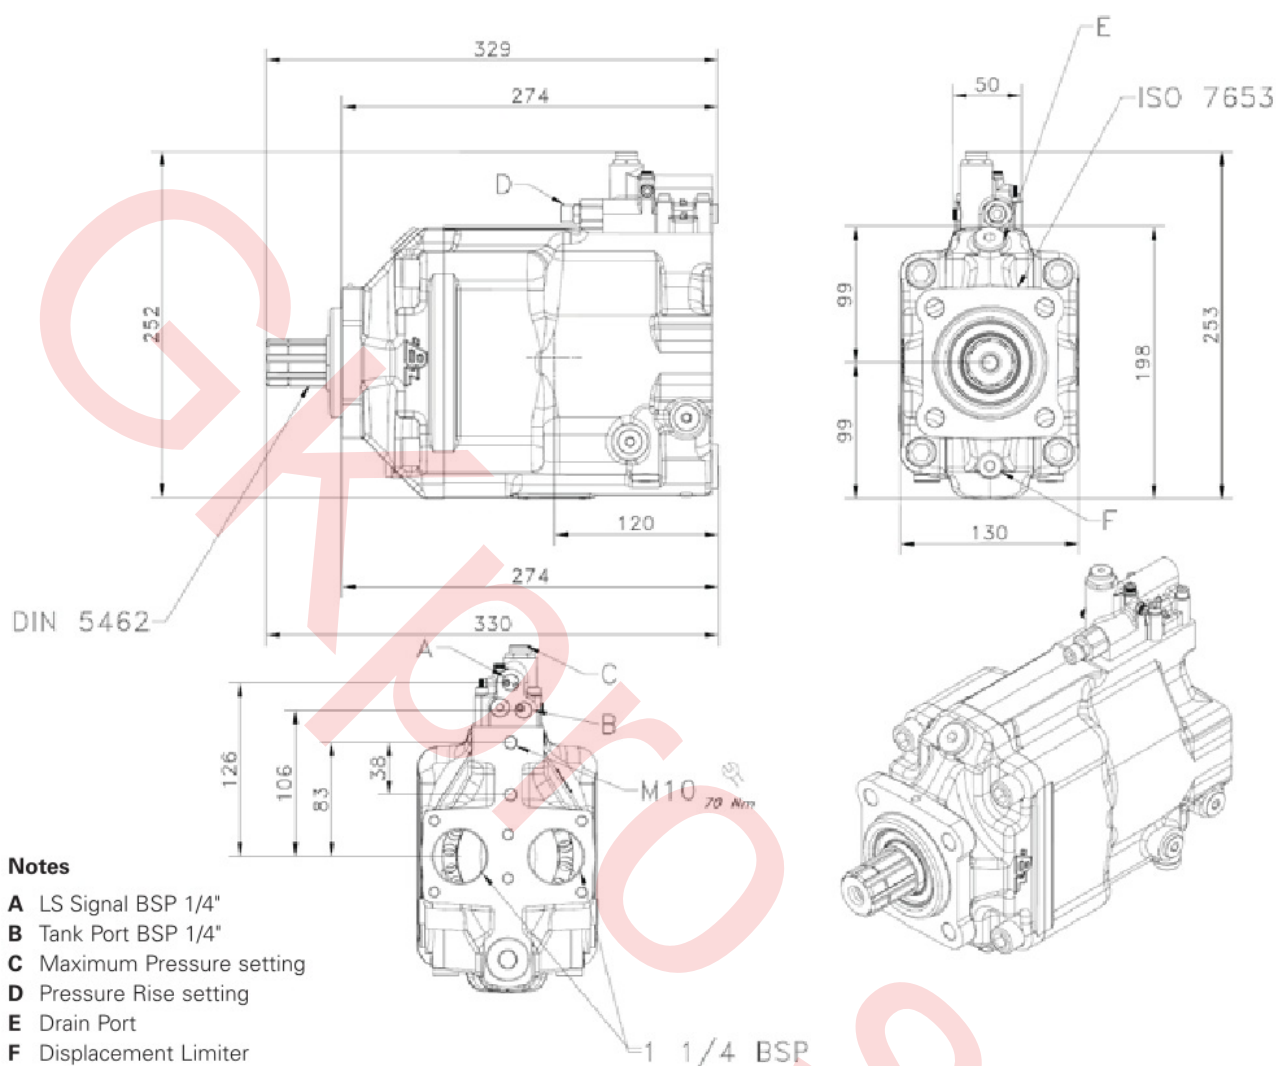


Notes


- A LS Signal BSP 1/4"
- B Tank Port BSP 1/4"
- C Maximum Pressure setting
- D Pressure Rise setting
- E Drain Port
- F Displacement Limiter

Accessories

Brass connector
P/N 9035216



Steel connector
P/N 9050116

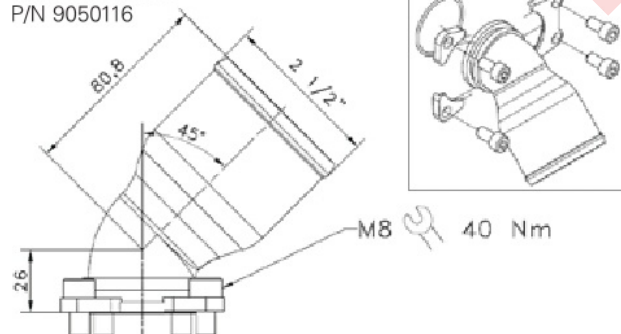

*** Displacement Limiter**

cc/rev.	P/N
95	90108399
110	90108499



+420 720 209 103 +420 792 335 980 +420 777 647 096



HYDRAULICKÉ KOMPONENTY
SERVIS, TECHNICKÁ PODPORA
NÁHRADNÍ DÍLY A PŘÍSLUŠENSTVÍ

www.gkpro.cz

GKpro s.r.o.

info@gkpro.cz