

## Battery Charger Rocket Flex

### Product description

The battery charger also works as a holder for the Rocket Flex. The charger can be assembled on the machine with a 1/4" UNC screw, same as RAM-Mount Size B holders. While the Rocket Flex is charging the blue LED is flashing. When charging is finished, the blue LED is lit. The charger is delivered with a 1.8meter cable with open wires.

### Illustration




#### IMPORTANT!

During charging, the ambient temperature needs to be between +5° and +45°C.  
~ 41°F to +113°F

## Technical data

Power Supply	9-36 VDC
IP-Class	IP21
Overload protection	Yes (still recommended to use a 3A fuse)
Current consumption	<15mA (idle) 200-900mA during charging(depending on supply voltage)
Charging time	2 hours and 20 minutes
Cable length	1,8 m
Assembly	1/4" UNC (Suited for RAM-Mount Size B)
Ambient temperature	-20°C to +70°C
Charging temperature	+5°C to +45°C
Dimensions	70 x 35,5 x 113 mm
Weight	70 g
	~ 0.2 lbs

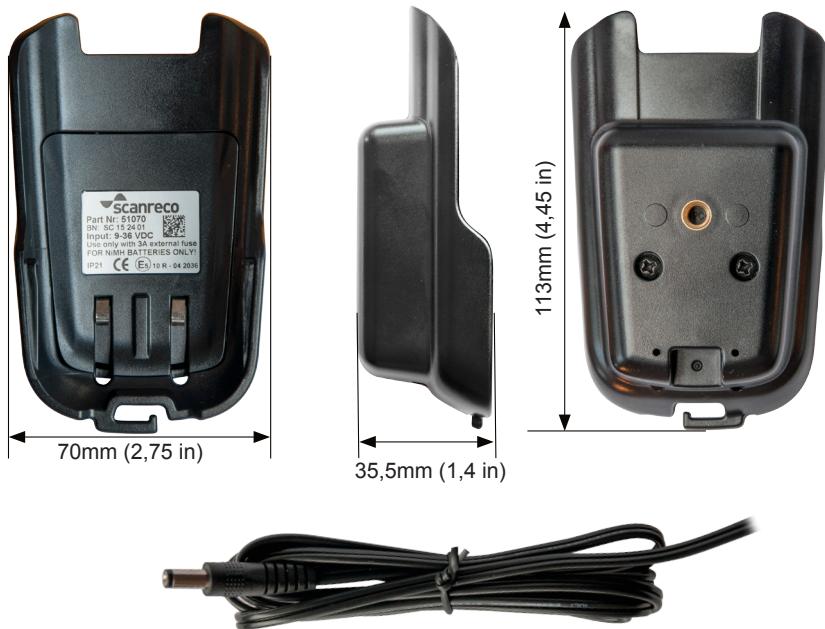

## Order information

Part number	Descriptiton
51070	Battery Charger for Rocket Flex (incl cable)
46207	Cable for charger (spare part)