

G5 Transmitters Rocket Flex

Product description

- Light weight, water and impact resistant.
- 128x64 pixel OLED Display (optional).
- 14 pushbuttons 1- or 2-steps in different configurations.
- Stop function in accordance with EN ISO 13849-1 cat. 3, PL d
- 5 LED for machine and status feedback.
- Blue LED for charger indication.
- Powered with 3 AA rechargeable batteries (included in the delivery).
- Belt clip for convenient attachment on the operators belt.


Illustration



Technical data

Platform	G5
Power Supply	3 x AA rechargeable batteries
IP-Class	IP65
LED for feedback	Green, Yellow, Yellow, Yellow, Red
Radio Frequency	2.4 GHz using frequency jumping technology
Operating range	> 100m > ~330 ft
Operating time	Without display: up to 120 hours of operation With display: up to 40 hours of operation (depending on usage of LED and display)
Approvals	TR05 Integrated duplex radio ISM-band, R&TTE, FCC and IC approved
Stop function	In accordance with EN ISO 13849-1 cat. 3, PL d
Ambient Temperature	-25°C to +55°C ~ -15°F to +130°F
WxHxD	69 x 213 x 48 mm ~ 2.7 x 8.4 x 1.9 in
Weight	400 g (including batteries) ~ 0.88 lbs (including batteries)

Button & LED assignments

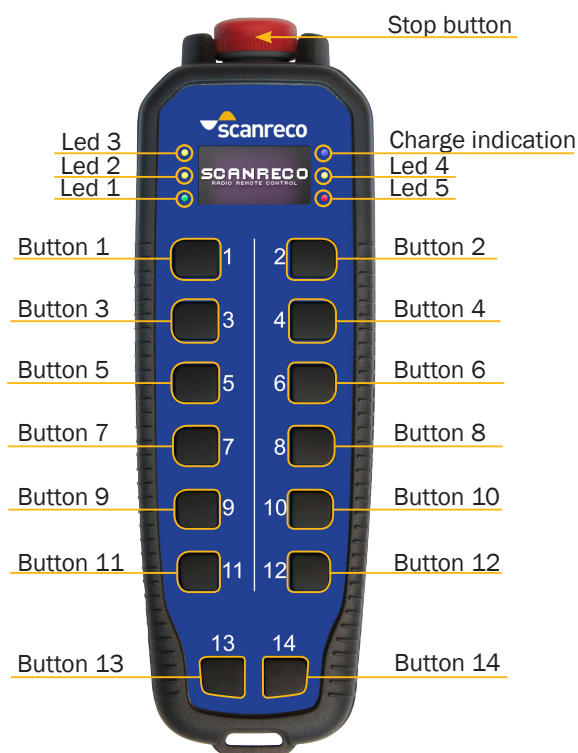

Order information

Part number	Descripton
50171	G5 RF14B 14x1-step
49505	G5 RF14A 12x2-step, 2x1-step (button 13 and 14)
51207	G5 RF14E 14X2-step
50142	G5 RF14B Display 14x1-step
49503	G5 RF14A Display 12x2-step, 2x1-step (button 13 and 14)
50558	G5 RF14E Display 14x2-step

G5 RF 14



G5 RF 14 Display

