

BENNE BVT 1


I - Benna bivalve a cilindro verticale per carico e scavi leggeri

GB - Clamshell bucket with vertical cylinder for loading and light digging


D - Zweischalengreifer mit senkrechtem Zylinder für leichte Ausgrabungen und Last

F - Benne preneuse à vérin vertical pour travaux de chargement et de creusage léger

E - Cuchara bivalva con cilindro vertical para carga y excavaciones ligeras

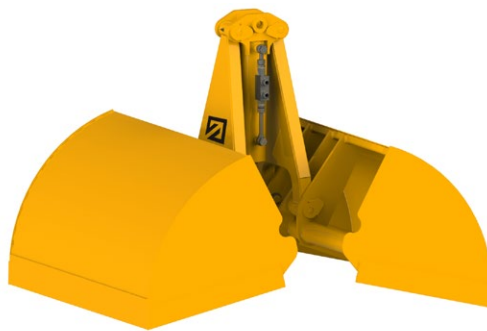

DISEGNO TECNICO / TECHNICAL DRAWING

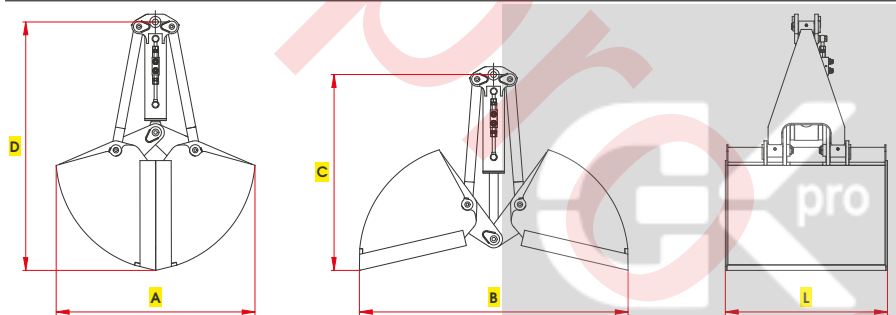

Portata gru a braccio sfilato / Lifting capacity at the end of boom



Peso escavatore / Excavator weight

Modello Type	Capacità Capacity	Portata Load	Peso Weight	Pressione Pressure	Portata olio Oil flow			A	B	C	D	L
	Lt	kg	kg	Max bar	Lt/min	Ton.	Ton.	mm	mm	mm	mm	mm
BVT 35/1	35	150	65	200	15	0,1-0,3	0,8-1,0	590	730	660	770	300
BVT 55/1	55	250	75	200	15	0,2-0,4	0,8-1,2	590	730	660	770	500
BVT 100/1	100	500	130	200	30	0,4-0,8	1,2-2,0	850	1100	950	1165	430
BVT 155/1	150	500	152	200	30	0,5-0,9	1,5-2,5	850	1100	950	1165	630
BVT 200/1	200	1000	240	200	60	0,8-2,0	2,0-3,5	1020	1370	1010	1280	630
BVT 300/1	300	1000	260	200	60	0,8-2,2	3,0-4,5	1020	1370	1010	1280	830
BVT 400/1	400	1000	280	200	60	0,8-2,4	3,5-7,0	1020	1370	1010	1280	1030
BVT 500/1	500	1000	300	200	60	1,0-2,8	4,0-8,0	1020	1370	1010	1280	1230