FORMIKO HYDRAULICS

ROTATOR FHR 4.5L

45 kN

22.5 kN

1200 nm

24 kg

20 l/min

L73 ø25	R	R	GO/GC	GO	GC
mm	3/8" BSP	250 bar	3/8" BSP	200 bar	300 bar

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 25mm.

Hydraulic rotator FHR 4.5L is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.



FHL 01-A/B-73/25

FHL 01B-A/B-73/25

FHL 05B-A/B-73/25

FHL 05-A/B-73/25


FHL 04-25


FHL 04B-25


FHL 04B-2525

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 59mm and the fixing pin (not included) diameter 30mm

ø59 ø30	GO/GC
mm	3/8" BSP

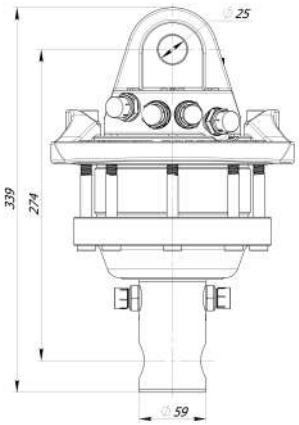

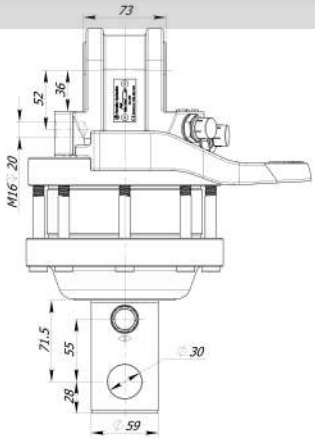



For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd
Dzirciema Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 4.5L

FORESTRY AGRICULTURE CONSTRUCTION

Current document is automatic generated at www.formiko.lv on 09/22/2026.
Please always make sure that it's up to date and try to be paperless!

FORMIKO HYDRAULICS

ROTATOR FHR 4.5L

Hydraulic rotator FHR 4.5L is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 25mm.

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 59mm and the fixing pin (not included) diameter 30mm

Rotator FHR 4.5L based on reliable vane type hydraulic motor which delivers torque up to 1200Nm at 25MPa.

Formoko rotator FHR 4.5L is compatible with FHL 01-A/B-73/25 and FHL 01B-A/B-73/25 and FHL 05B-A/B-73/25 and FHL 05-A/B-73/25 and FHL 04-25 and FHL 04B-25 and FHL 04B-2525 series links.

Rotator for shipping is packed in compact solid cardboard box with dimensions 340x230x240mm.

We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd
Dzirciema Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 4.5L

FORESTRY AGRICULTURE CONSTRUCTION

Current document is automatic generated at www.formiko.lv on 09/22/2026.
Please always make sure that it's up to date and try to be paperless!