FORMIKO HYDRAULICS

ROTATOR FHR 6FD1

60 kN

-50 kN

30 kN

-25 kN

1850 nm

45 kg

25 l/min

FORGED STEEL IN MY BODY

DOUBLE ROLLER/TAPPER BEARING

	R	R	GO/GC	GO	GC
L80 ø35 mm	1/2" BSP	250 bar	1/2" BSP	250 bar	300 bar

Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.

Hydraulic rotator FHR 6FD1 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.



FHL 02




FHL 02B





FHL 02B-100-45

Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws

GO/GC	GO/GC
ø173 17(x6) mm	1/2" BSP	1/2" BSP

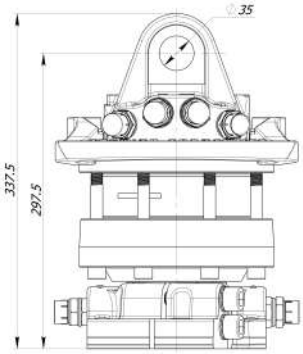

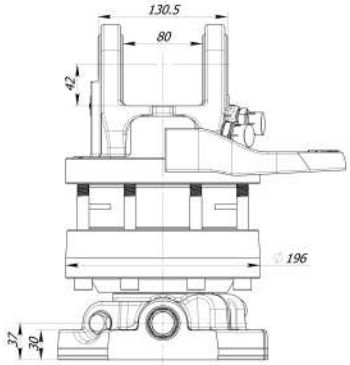

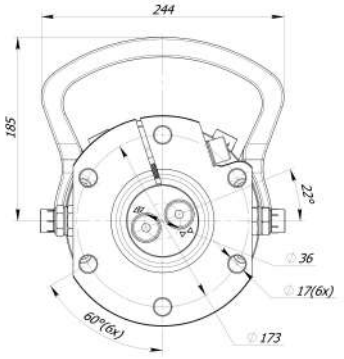

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd
Dzirciema Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 6FD1

2 YEAR FORMIKO HYDRAULICS WARRANTY

FORESTRY GENERAL CARGO AGRICULTURE CONSTRUCTION RECYCLING

Current document is automatic generated at www.formiko.lv on 11/06/2026.
Please always make sure that it's up to date and try to be paperless!

FORMIKO HYDRAULICS

ROTATOR FHR 6FD1

Hydraulic rotator FHR 6FD1 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.

- Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.
- Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws
- Rotator FHR 6FD1 based on reliable vane type hydraulic motor which delivers torque up to 1850Nm at 25MPa.
- Formiko Hydraulics rotator FHR 6FD1 is equipped with double bearings to withstand both tensional and pushing loads.
- Some parts in rotator are built from shock resistant and deformation resistant forged steel.
- Formoko rotator FHR 6FD1 is compatible with FHL 02 and FHL 02B and FHL 02B-100-45 series links.
- Rotator for shipping is packed in compact solid cardboard box with dimensions 400x250x250mm.
- We providing TWO year warranty for this rotator.

GK pro

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd
Dzirciema Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 6FD1

FORESTRY GENERAL CARGO AGRICULTURE CONSTRUCTION RECYCLING

Current document is automatic generated at www.formiko.lv on 11/06/2026.
Please always make sure that it's up to date and try to be paperless!